

2646 ES



SPECIFICATIONS



Electric Scissor Lift

Key Specs

- Platform Height: 7.92 m / 26 ft
- Machine Width: 1.17 m / 3.8 ft
- Working Height: 9.92 m / 32.5 ft

Key Features

- Quieter, cleaner operation for a variety of environments
- Electric drive and integrated components with only two hydraulic hoses and four hydraulic fittings on the entire machine will keep you on the job longer and reduce your operating costs by reducing chances for leaks and service calls
- Tight turning radius for great maneuverability

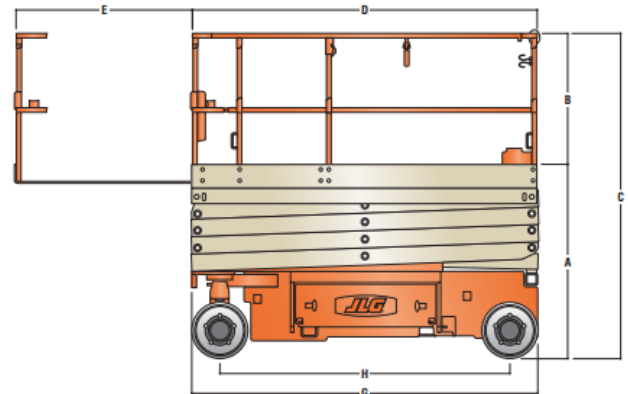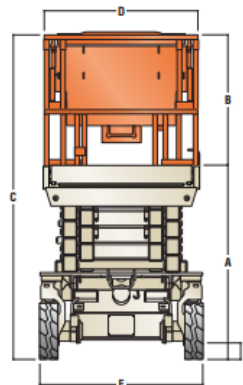



SPECIFICATIONS

2646 ES

Power Source	
Batteries	4 x 6V, 220 A-h
Charger	20 A automatic
General Specifications	
Brakes	Electric, Friction
Capacity - Hydraulic Reservoir	6.40 L / 1.7 gal.
Ground Bearing Pressure	6.90 Kg/cm2
Hydraulic Pump	Fixed Displacement Gear
Machine Weight (ANSI Export and CSA)	2257 kg / 4975.8 lb
Machine Weight	2738 kg / 6036.3 lb
Performance Data	
Turning Radius - Inside	0 m / 0 ft
Drive Speed - Platform Elevated	0.80 km/h / 0.5 mph
Drive Speed - Platform Lowered	4 km/h / 2.5 mph
Gradeability	25 %
Lift Time	40 sec.
Lower Time	50 sec.
Maximum Drive Height	7.92 m / 26 ft
Maximum Lift Height	7.92 m / 26 ft
Platform Capacity - Extension	120 kg / 264.6 lb
Platform Capacity - Unrestricted	450 kg / 992.1 lb
Turning Radius - Outside	2.41 m / 7.9 ft
Dimensional Data	
Ground Clearance	0.13 m / 5 in.
Machine Height	2.36 m / 7.7 ft
Machine Height - Rails Folded	1.97 m / 6.5 ft
Machine Length	2.50 m / 8.2 ft
Machine Width	1.17 m / 3.8 ft
Platform Dimension A	1.12 m / 3.7 ft
Platform Dimension B	2.50 m / 8.2 ft
Platform Extension Length	1.27 m / 4.2 ft
Platform Height	7.92 m / 26 ft
Platform Height - Lowered	1.26 m / 4.1 ft
Platform Railing Height	1.10 m / 3.6 ft
Tire Size	41 x 12.5 cm
Wheelbase	2.09 m / 6.9 ft
Reach Specifications	
Platform Height	7.92 m / 26 ft
Working Height	9.92 m / 32.5 ft