

3246 ES



SPECIFICATIONS



Electric Scissor Lift

Key Specs

- Machine Width: 3 ft 10 in. / 1.17 m
- Platform Height: 31 ft 9 in. / 9.68 m

Key Features

- Quieter, cleaner operation for a variety of environments
- Electric drive and integrated components with only two hydraulic hoses and four hydraulic fittings on the entire machine will keep you on the job longer and reduce your operating costs by reducing chances for leaks and service calls
- Tight turning radius for great maneuverability

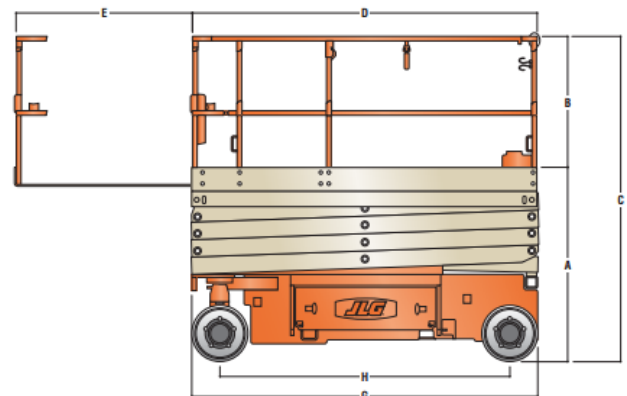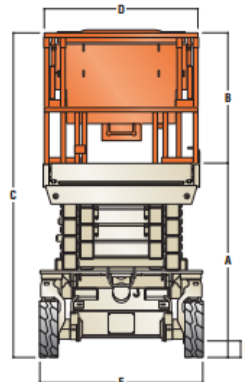



SPECIFICATIONS

3246 ES

Power Source

Batteries	4 x 6V, 220 amp-hr
Charger	20 amp automatic

General

Brakes	Electric, Friction
Capacity - Hydraulic Reservoir	2 gal. / 6.44 L
Ground Bearing Pressure	87 psi / 6.09 Kg/cm ²
Hydraulic Pump	Fixed Displacement Gear
Machine Weight	4975 lb / 2256.62 kg

Performance

Drive Speed - Platform Elevated	0.50 mph / 0.80 km/h
Drive Speed - Platform Lowered	3 mph / 4.02 km/h
Gradeability	25 %
Lift Time	55 sec.
Lower Time	62 sec.
Maximum Drive Height	31 ft 9 in. / 9.68 m
Maximum Lift Height	32 ft / 9.68 m
Platform Capacity - Extension	250 lb / 113.40 kg
Platform Capacity - Restricted	1000 lb / 453.59 kg
Platform Capacity - Unrestricted	700 lb / 317.51 kg
Turning Radius - Outside	7 ft 11 in. / 2.42 m

Dimensional Data

Ground Clearance	5 in. / 0.13 m
Machine Height	7 ft 9 in. / 2.36 m
Machine Height - Rails Folded	6 ft 6 in. / 1.97 m
Machine Length	8 ft 3 in. / 2.5 m
Machine Width	3 ft 10 in. / 1.17 m
Platform Dimension A	8 ft 3 in. / 2.5 m
Platform Dimension B	3 ft 8 in. / 1.12 m
Platform Extension Length	4 ft 2 in. / 1.27 m
Platform Height	31 ft 9 in. / 9.68 m
Platform Height - Lowered	4 ft 2 in. / 1.26 m
Platform Railing Height	3 ft 7 in. / 1.1 m
Tire Size	16 x 5 in
Wheelbase	6 ft 10 in. / 2.08 m

Reach Specifications

Platform Height	31 ft 9 in. / 9.68 m
Working Height	37 ft 9 in. / 11.51 m